

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R1W


SEC 18

1/4

SEC 19

U.S.B.&M.

LINE	BEARING	DISTANCE
L1	N 40°18'30" E	58.08'
L2	S 42°27'34" E	51.59'
L3	S 19°55'38" E	40.30'
L4	N 31°45'54" E	23.32'
L5	N 65°49'46" W	28.76'
L6	N 56°21'49" W	25.74'
L6	N 56°21'49" W	25.74'
L7	N 48°08'50" E	17.39'

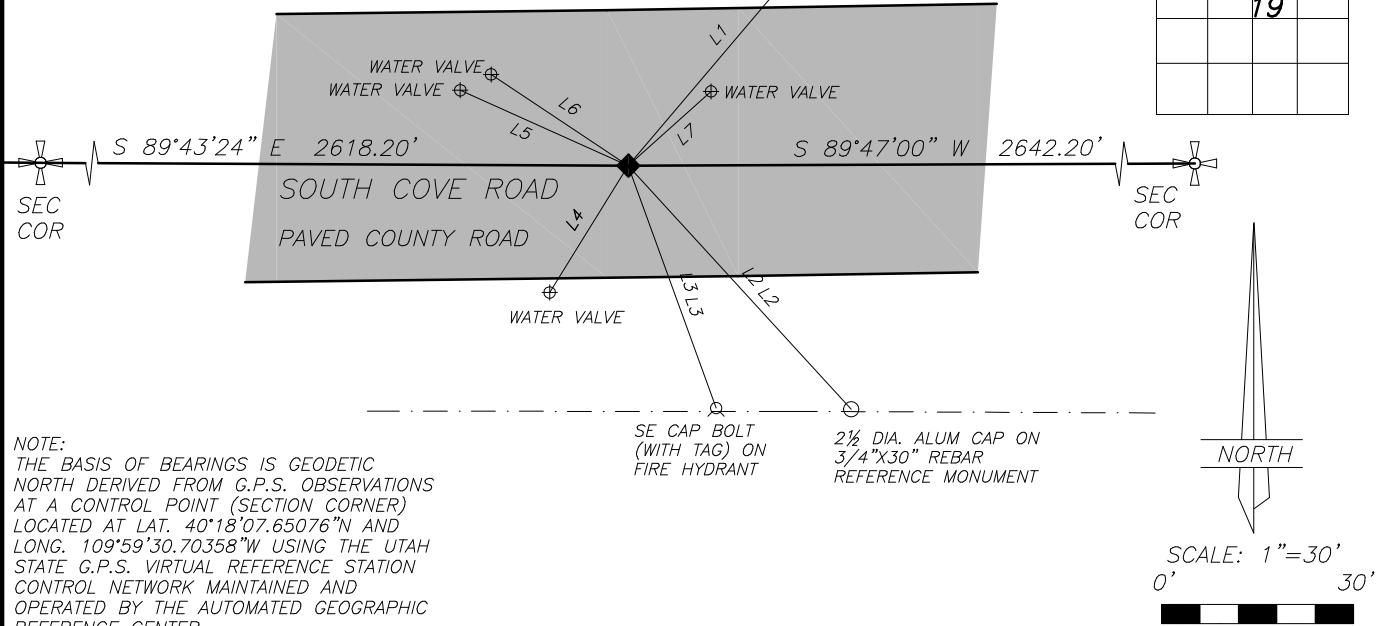

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND MONUMENT (MAG) SPIKE WITH BRASS WASHER IN PAVED COUNTY ROAD AT POSITION OF QUARTER CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 2 1/2" DIA. ALUM CAPS ON 3/4"X30" REBAR REFERENCE MONUMENTS, AS WELL AS UTILITY FEATURES, AND ADJOINING CORNERS USED AS REFERENCES AS SHOWN



PHOTO OF MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7282087.188  
E: 2047855.063  
NAVD88 EL: 5121.54'

LATITUDE: 40°18'07.47739" N  
LONGITUDE: 110°02'20.71663" W  
ELLIPSOID HEIGHT: 5064.72'  
(GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300020S0010W0\_140400

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

